Powered by **Innovation**





DOOSAN



HB series

5REASONS TO USE DOOSAN BREAKERS



Performance

Doosan HB Breakers offer powerful performance and top notch productivity-whether you are demolishing concrete or breaking rocks.



Engineering Approved

HB series are optimized for Doosan excavators, fully certified by Doosan engineering.



One-Stop Service

Same as Doosan excavators, Doosan breakers will covered by strong Doosan service network and Doosan product specialists, providing "One-stop service" experience.



Warranty

Avoid compatibility and warranty coverage arguments from using Non-approved breaker.

Doosan offers standard Warranty up to 2 Years.




Price

Even with 2-year warranty, HB-series are offered at reasonable price, providing customer benefits in total cost of ownership.



FEATURES & BENEFITS

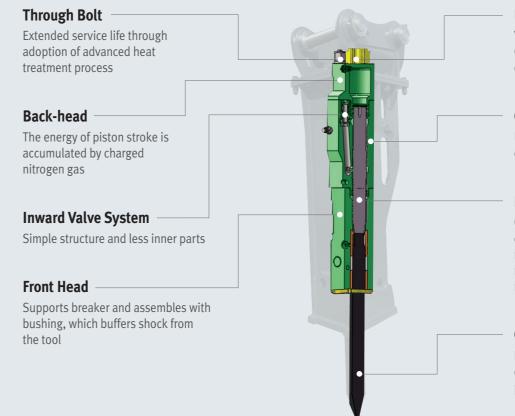

HB03 / HB04 / HB06 / HB08 / HB15

Urethane Dampper

Vibration dampening prevents Carrier damage and improves operator comport

Cylinder

Unique heat treatment process ensures stable quality

Piston

Quality and durability was drastically enhanced as result of quality proven material in terms of anti-wear, heat resistance, anti-impact, pressure resistance strength etc

Chisel

Doosan genuine working tool ensures Doosan hyd. Breaker's performance and productivity



HB series



ltem	Model	HB03	HB04	HB06	HB08	HB15
Total Weight	kg	100	150	300	390	900
Length	mm	1107	1210	1390	1491	2065
Width	mm	260	260	328	328	440
Height	mm	298	298	400	400	520
	kg / cm²	90 - 120	90 - 120	110 - 140	120 - 150	150 - 170
Operating Pressure	psi	1280 - 1700	1280 - 1700	1562 - 1988	1704 - 2130	2130 - 2414
	bar	88 -117	88 - 117	108 - 137	118 - 147	147 - 166
Hydraulic Flow Range	l / min	20 - 30	25 - 50	40 - 70	50 - 90	80 - 110
Impact Frequency	bpm	700 - 1200	600 - 1100	500 - 900	400 - 800	350 - 700
Diameter of Hose	mm	12.7	12.7	12.7	12.7	19.05
	inch	1 / 2	1 / 2	1 / 2	1 / 2	3 / 4
Diameter of Tool	mm	45	53	60	75 / 80	100
Weight of Tool	kg	8	9	18	26	57
Suitable Carrier	ton	1.2 - 3.0	2.5 - 4.5	4 -7	6 -9	10 - 15
Matching Doosan excavators		DX17Z DX19	DX27Z DX35Z	DX57W DX62R DX63	DX85R	DX140LC DX140LCR DX140W DX160LC DX160W DX165W

BRACKET TYPE



HOUSING (LOW NOISE)

Recommended for professional contractors working in urban zones, where noise level must be controlled or where local regulation may require silenced breakers

- Low noise (120 dB)
- Less vibration due to urethane damper inside

TOOL SELECTION

USE THE RIGHT TOOL FOR THE RIGHT JOB

Breaker Tool (Chisel) is a wear part and tool consumption is the main causative for wear part costs.

It is important to select an appropriate tool according to the nature of work and the characteristics of the object to break.

Genuine Doosan tools are designed to best fit Doosan breakers.



MOIL POINT

Demolition
Hard Ground
Hard Ground with Failures
Concrete



PYRAMIDAL

Trenching
General Excavation
Asphalt
Soft Ground with Faults

Concrete
Reinforced Concrete

WEDGE

Trenching General Excavation Soft Ground with Faults Concrete

Reinforced Concrete

BLUNT

Block Splitting
Conpact Abrasive
Difficult to Position
Concrete Slabon Demolition

PARTS & WARRANTY

GENUINE PARTS

Easy maintenance, less downtime! Minimizing downtime gives you the edge when it comes to productivity.





Doosan offers you 2 Year Standard Warranty on all major components as standard for no extra cost.

Warranty terms for wear parts vary between 6 to 12 months.